


TABLE "D" SLIP ON PLATE FLANGES

VALVES
 GALVANISED
 MALLEABLE
 STAINLESS
 STEEL FITTINGS
 BLACK & GAL
 STEEL FITTINGS
 HIGH PRESSURE
 FITTINGS
 CAMLOCKS
 ROLL GROOVE
 BUTTWELD
 FLANGES

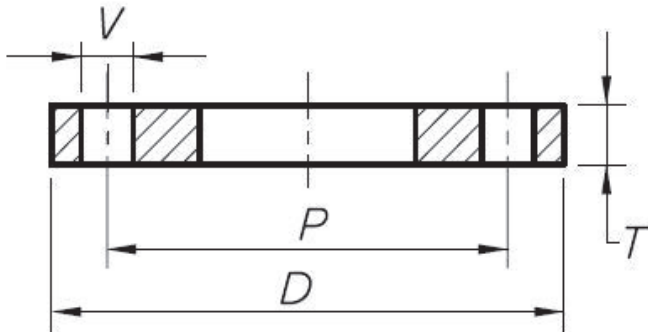

Nominal Pipe Size (mm)	GVF Code	OD of Flange D (mm)	Bolt Circle Diameter P (mm)	Bolt Hole Diameter V (mm)	Number of Bolt Holes	Thickness of Flange T (mm)	Weight Approx. (Kg)
100	ASSOD100	215	178	18	4	12	2.39
125	ASSOD125	255	210	18	8	13	3.47
150*	ASSOD150	280	235	18	8	13	3.94
200	ASSOD200	335	292	18	8	13	4.95
250	ASSOD250	405	356	22	8	16	8.63
300	ASSOD300	455	406	22	12	19	11.32
350	ASSOD350	525	470	26	12	22	19.07
400	ASSOD400	580	521	26	12	22	22
450	ASSOD450	640	584	26	12	25	29.43
500	ASSOD500	705	641	26	16	29	39.88
600	ASSOD600	825	756	30	16	32	57.17

MATERIALS
Q235B / Rst37.2
Plate Steel

SPECIFICATIONS
Pressure Rating
700 kPa
*Available to suit 165 or 168 pipe

STANDARD
Dimensional
AS2129